

**TECHNICAL
SPECIFICATIONS
MARSHALL E. RINKER, SR.
PLAYHOUSE**



**WEST PALM BEACH, FLORIDA
2026**

Table of Contents

Staff Contacts.....	3
Seating Chart	4
Dimensions and Specifications	5
Portable Stage	8
Soft Goods Inventory	8-11
Lighting Inventory & Grid	12-15
Light Plot	15-17
Sound	18-20
Wardrobe /Dressing Rooms/Communications and Orchestra Equipment.....	21-23
Rinker Playhouse and Area Floor Plan.....	24
Map of Surrounding Area.....	23-24
Loading and Lobby Area Photos	26-27

Stage Door / Loading Circle and Security on Alexander Dreyfoos Way



MARSHALL E. RINKER, SR. PLAYHOUSE
at the
RAYMOND F. KRAVIS CENTER FOR THE PERFORMING ARTS

701 Okeechobee Blvd
West Palm Beach, FL 33401
MAIN OFFICE 561.651.4200 (M-F 8:30A-5:00P)
MAIN FAX 561.833.3901
TECH FAX 561.833.5962

THEATER TECHNICAL STAFF

Director of Production	Matt Wilt	561.651.4202	wilt@kravis.org
Production Manager	Melinda Gallant	561.651.4245	gallant@kravis.org
Director of Programming	Oscar Quesada	561.651.4422	oquesada@kravis.org
Box Office Contact	Twyla Mitchell	561.651.4240	tmitchell@kravis.org
Front of House Contact	Peggy Sheriff	561.651.4408	sheriff@kravis.org
Marketing Contact	Phala Murray	561.651.4387	murray@kravis.org

SEATING CONFIGURATIONS

Playhouse Maximum Seating Capacity - 305
Riser Seating.....195
Floor Seating.....110

Note: Seating varies depending on stage set up. Contact KCPA Technical department for details.

LOADING DOCK


The loading dock is located off Alexander Dreyfoos Way on the north side of the building. There are 3 bays, 2 with loading levelers. Dock is 4' high with 2,100 square feet of receiving room area. Loading doors are 8' wide by 12' high.

SHOP

The shop is a wood shop with welding facilities for light aluminum, metal & steel. Air compressors are available.

TRUCK, BUS AND CAR PARKING


Long term truck and bus parking must be prearranged with KCPA Technical Director. Paid parking is available in the garage with the Park Mobile App.

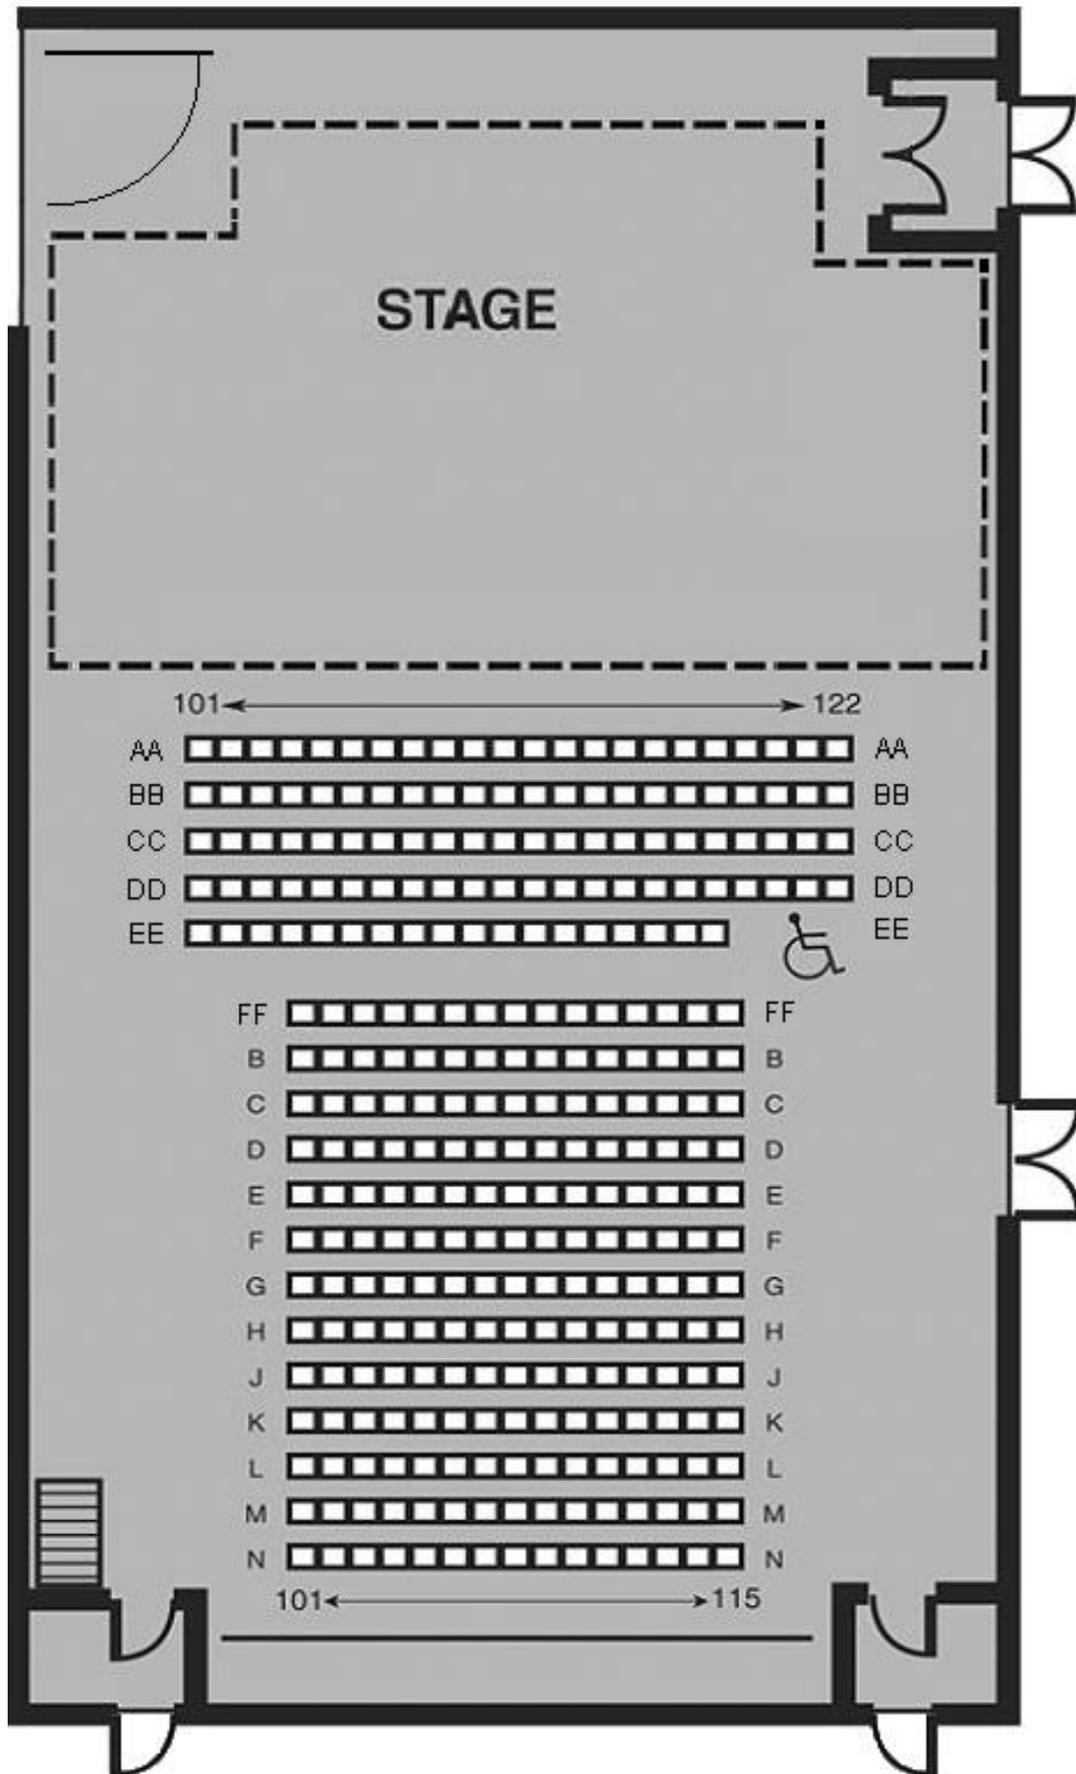

PLAYHOUSE DIMENSIONS AND SPECIFICATION


The Playhouse is a Black box Theatre. There is no fixed seating. It has a retracting seating riser that will hold 195 seats with additional room for floor seating depending on the size of your stage area. The room dimensions are 50' wide by 88' long and 33' high. It is a stained black floor constructed of 1-inch Maple tongue-and-groove on 3/4-inch plywood over two-by-fours with 1/2-inch neoprene pads.

There is a catwalk 16' off the floor on three sides of the room with a 4' high railing that lighting instruments may be attached to. There are (6) 36' long 1' x 2' trusses hung from 1/4 ton CM electric chain motors for soft goods.

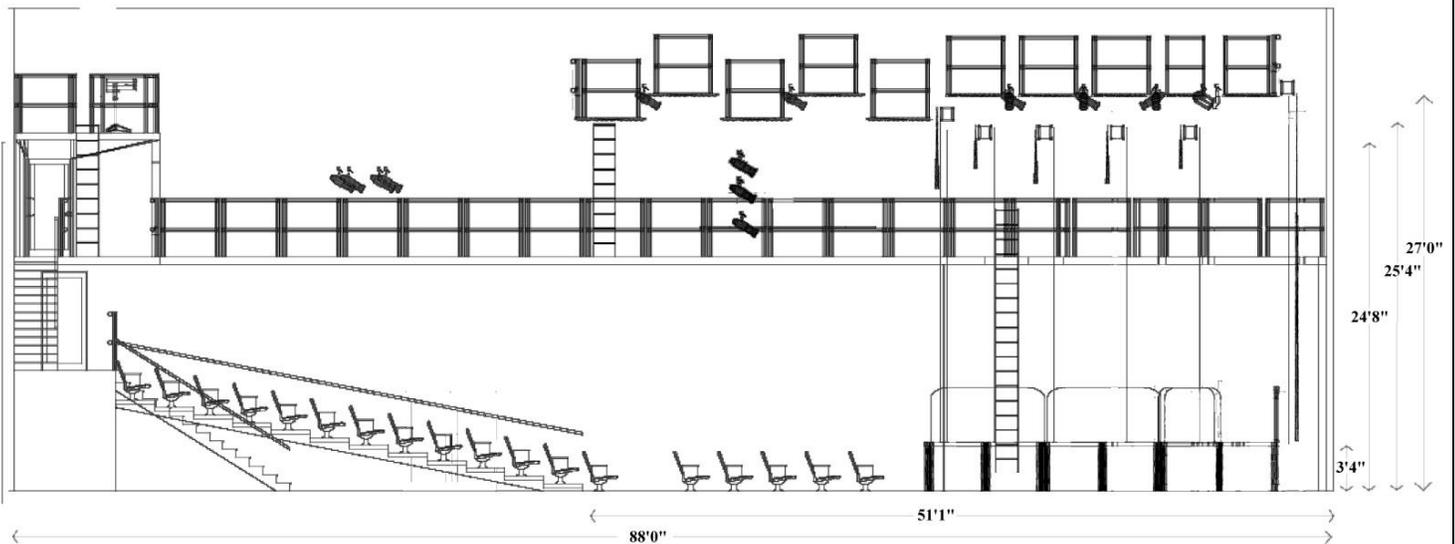

The control booth is located 84' from the back wall and is level to the catwalk. It contains the lighting control console, stage manager desk, and front projection control. The sound console is located on the catwalk to the house right side of the control booth.

There are two follow spots on the upper deck of the booth, accessible by ladder chase. There is an additional hanging position above the control booth 30'7" from floor height.

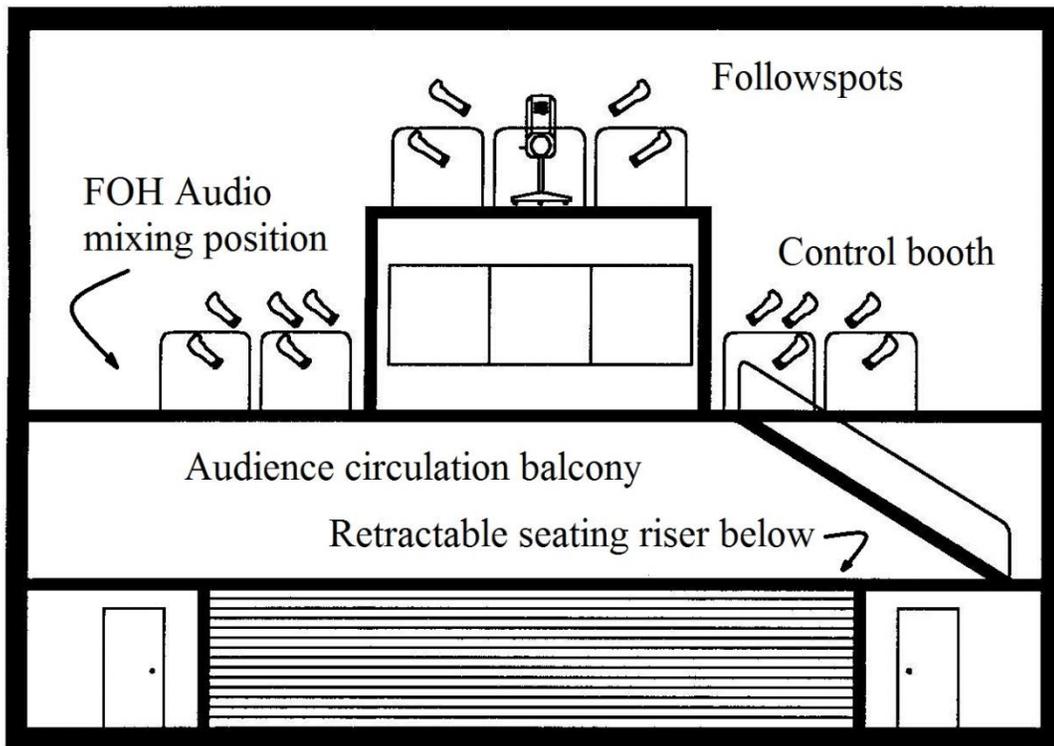



Audience from mid stage, showing balcony, boot



h, and follow spot levels.


PORTABLE STAGE

The portable stage is a Wenger Custom Versalite Platform System.

No screws or drilling of any kind is allowed into the portable deck.

The standard stage setup is 32" High x 48' wide x 24' deep.

There are 3 step units for backstage access. There are two sets of step units for audience access and stage skirting available in burgundy.

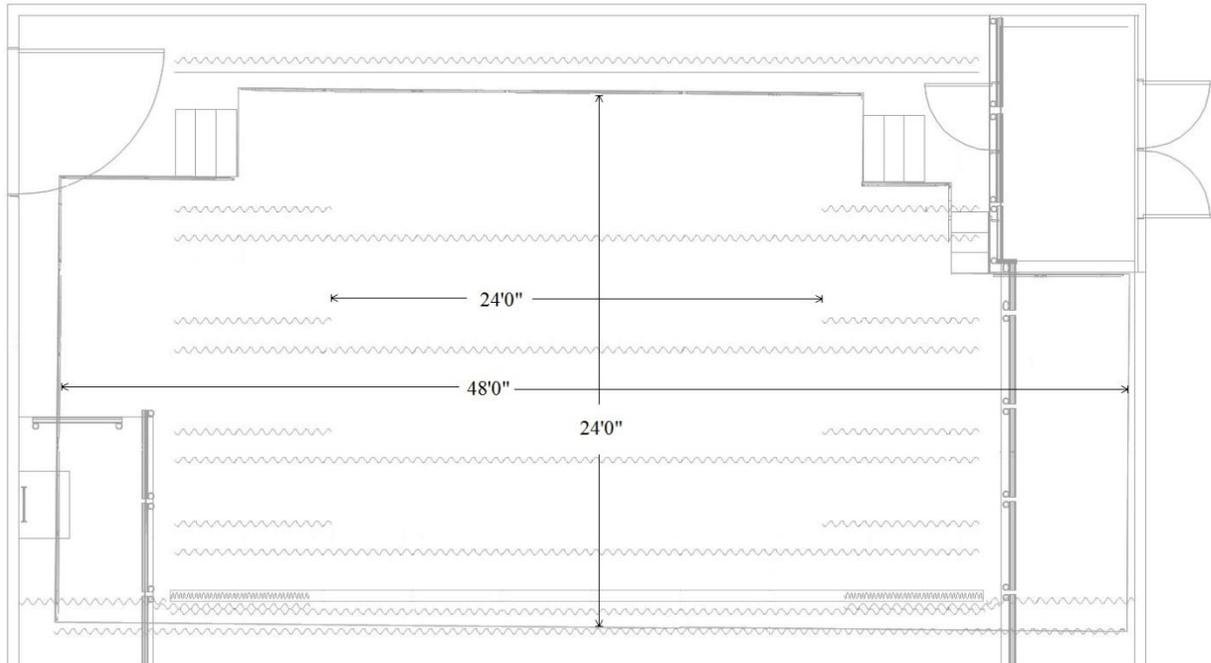

Stage with red legs on the #2 truss, creating a small apron. View from stage manager's desk in booth.


SOFT GOODS INVENTORY

The standard configuration of the Playhouse is as a proscenium theatre with an opening 28'0" wide by 16' high. The false proscenium and masking goods are hung from the portable trusses and include the following soft goods:


House Curtain (Brick Red)	2 panels of 20'8"H x 19'0"W center split on DS traveler. Hung by request.
Portal Valance (Brick Red)	1 panel of 5'6"H x 36'0"W
Portal Legs (Brick Red)	2 panels of 22'3"H x 7'0"W
Side Masking Tabs (Brick Red)	2 panels of 11'7"H x 6'0"W
DS Skirt (Brick Red)	1 panel of 32"H x 48'0"W
Stage Legs (Black)	8 panels of 22'6"H x 7'0"W (optional 40" extensions by request)
Stage Borders (Black)	2 panels of 3'0"H x 36'0"W
Stage Borders (Black)	3 panels of 4'0"H x 36'0"W
Full Stage Back Drop (Black)	2 panels of 23'9"H x 20'0"W center split on US traveler.
Cyclorama (White muslin)	1 panel of 23'8"H x 35'0"W
Sharktooth Scrim (Black)	1 panel of 23'6"H x 35'0"W. Hung by request.



From catwalk SL looking SR

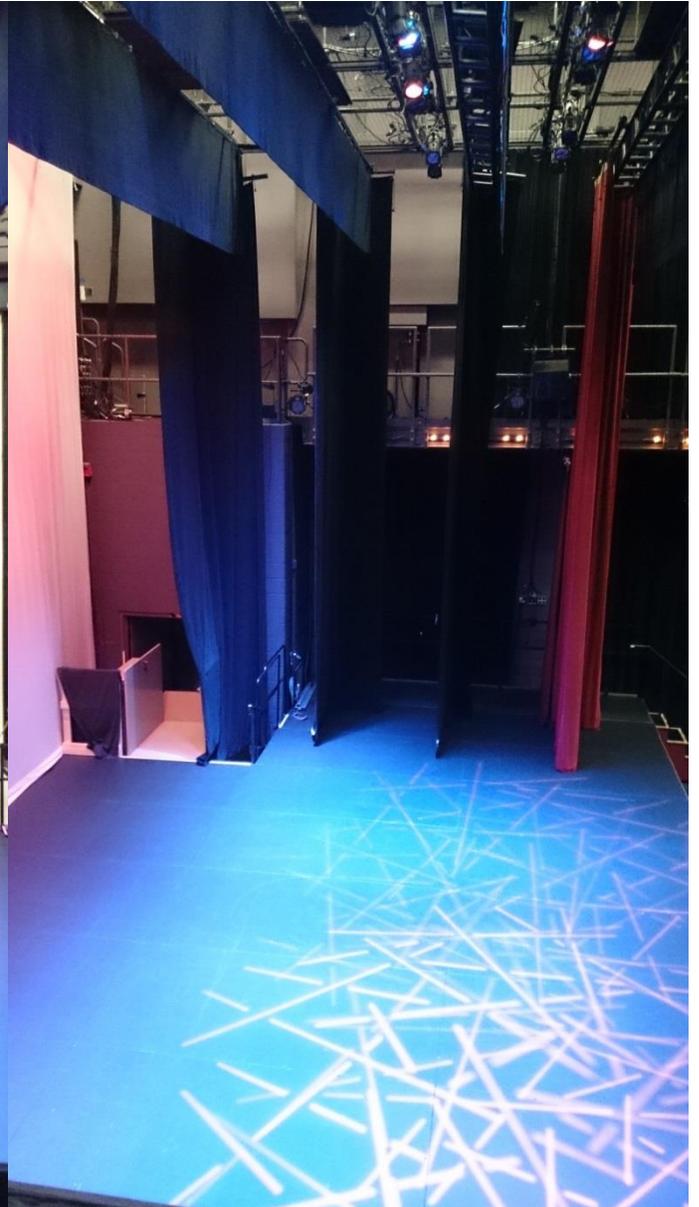


From catwalk SR looking SL

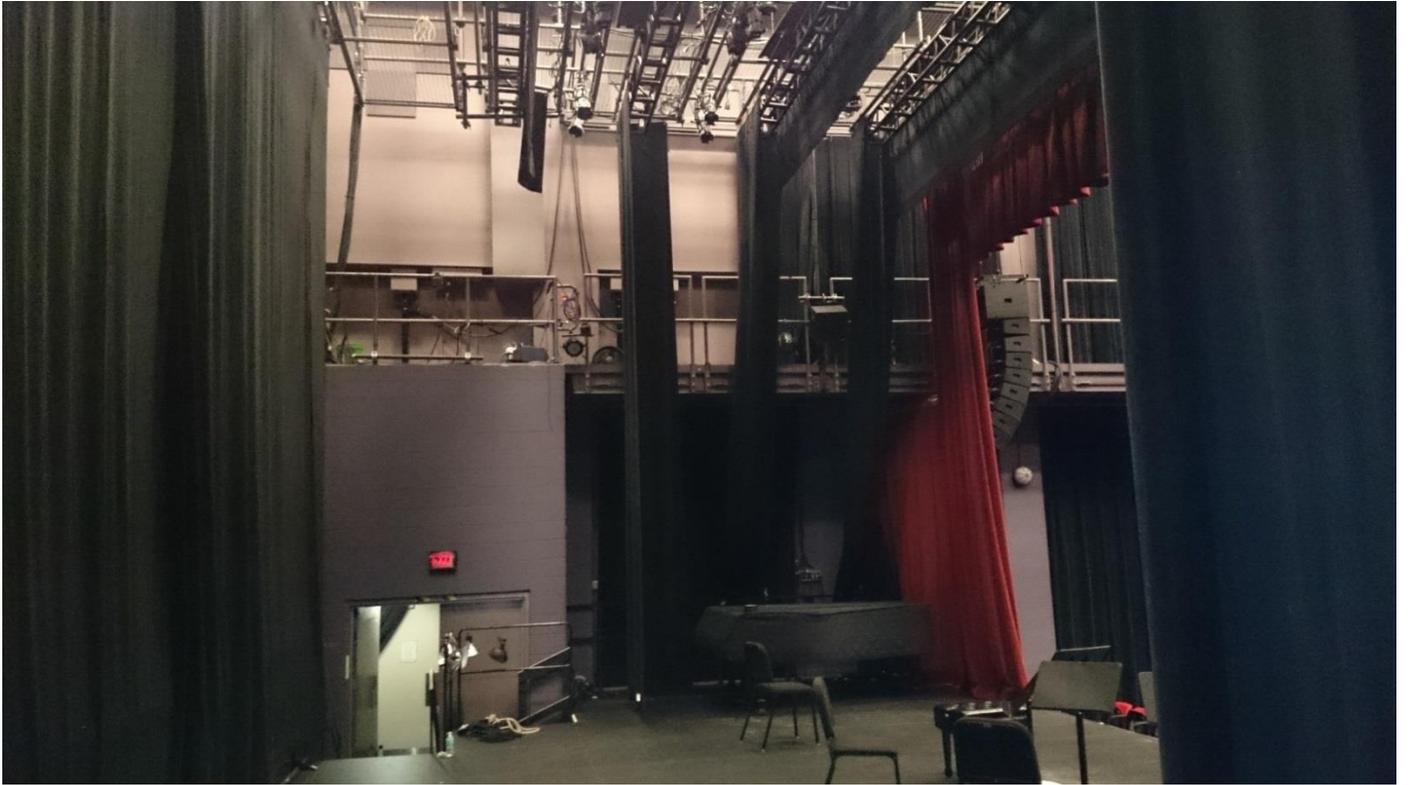

From USR. #4 legs removed to show stair arrangement and sound/light lock USL.



From DSL. #4 legs removed to show USR stair and loading area access.

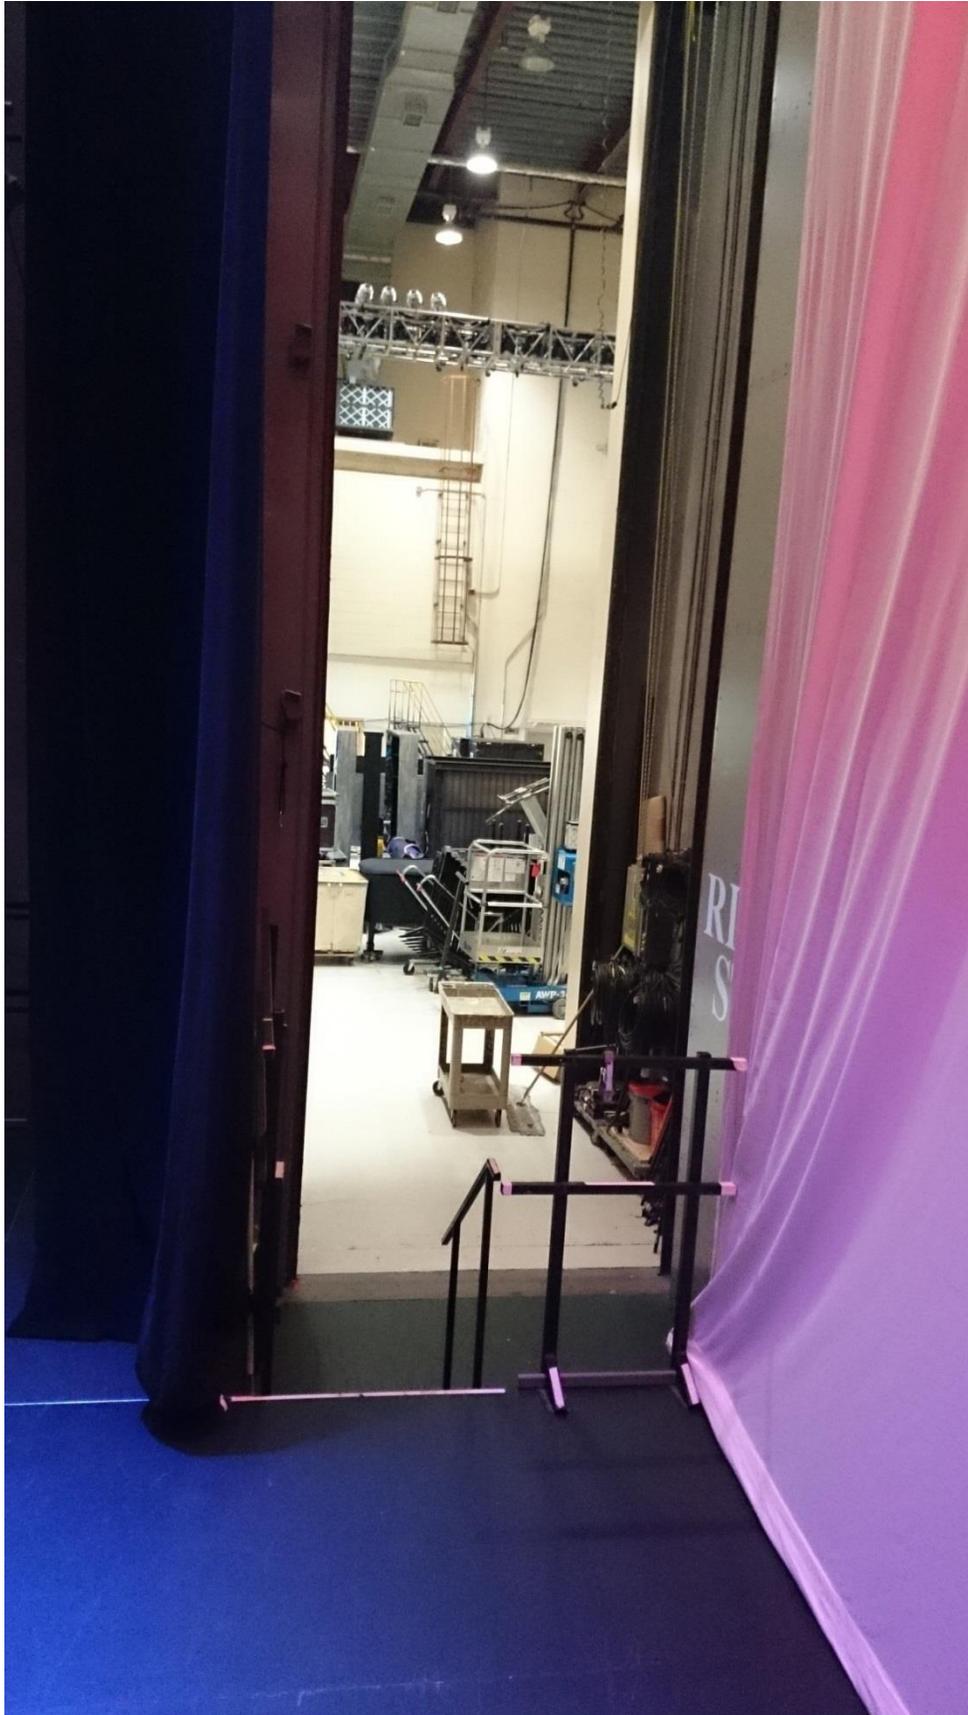

Access door to loading dock.

LIGHTING SYSTEM

The Playhouse lighting system is controlled by an ETC Ion Computerized Lighting Console and 190 20Amp Strand CD80 Advanced Electronic Dimmers. The venue uses a sACN network with Pathway Via switching and Pathway nodes. There are network and DMX ports distributed around the venue and can be configured as to DMX direction and universe.



HOUSE LIGHTING

There is a general house lighting plot (see following pages). Lighting fixtures may be hung on catwalks on either side, from the catwalk front of house, above the Control Booth in front of house, and on the tension wire grid. Contact the KCPA Technical department for CAD drawings.

Overhead electrics are centered in 15" open wells in the tension wire grid

LIGHTING INSTRUMENT INVENTORY

4	Source 4 10° 575w	26	Source 4 Par MFL 575w
22	Source 4 36° 575w	2	Source 4 Par NSP 575w
50	Source 4 26° 575w	18	ColorKinetics Colorblast 12 TRX
10	Source 4 19° 575w	6	Strand PLCyc RGBW
10	Source 4 ParNels 575w	4	PAR64 MFL – 500w (running lights only)
6	Elation Paragon S Fixtures		

FOLLOWSPOT

- 2 ETC source4 10° 750w with follow spot yoke, independent dimmer, manual color scroll, and iris.
- 2 Lycian Midget spot light


ADDITIONAL POWER


The Playhouse has a 3-phase, 400-amp, 120/208 panel located in the receiving area.

note: all inventory is subject to availability. Contact Kravis Technical Department for information.


LIGHTING GRID SYSTEM

The playhouse is equipped with a tension wire grid with wells for focusing lighting instruments. The tension wire grid is a custom SkyDeck system. Schedule 40 pipe is attached at each well creating positions for lighting. See following pages for photos from A, B, and C.

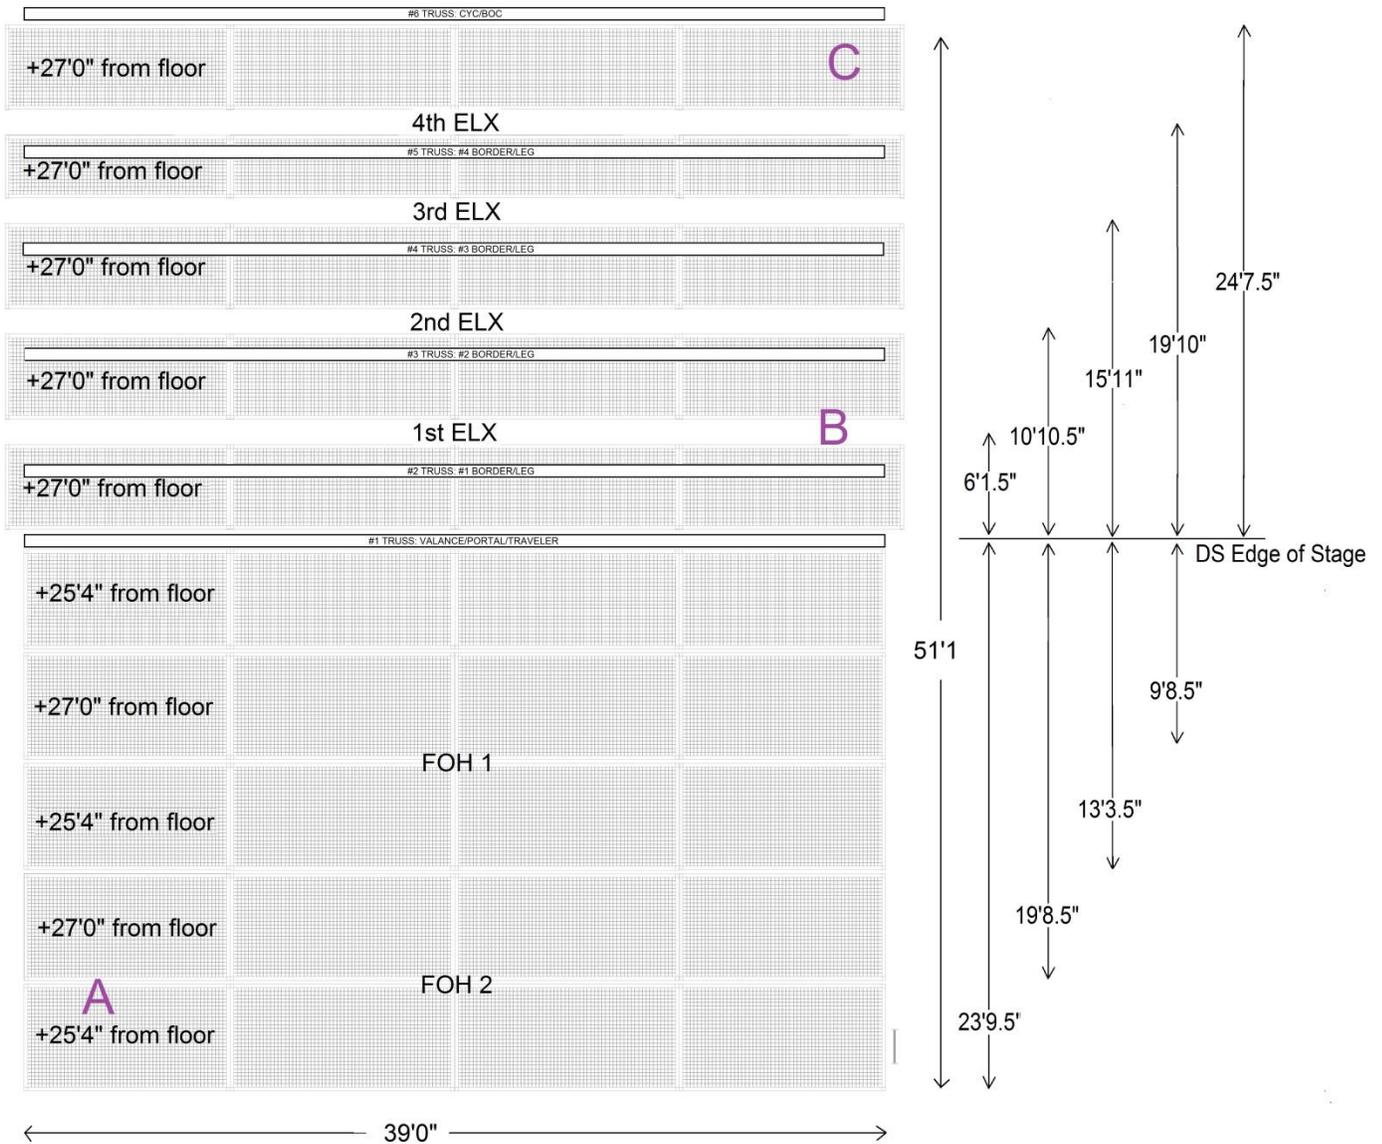

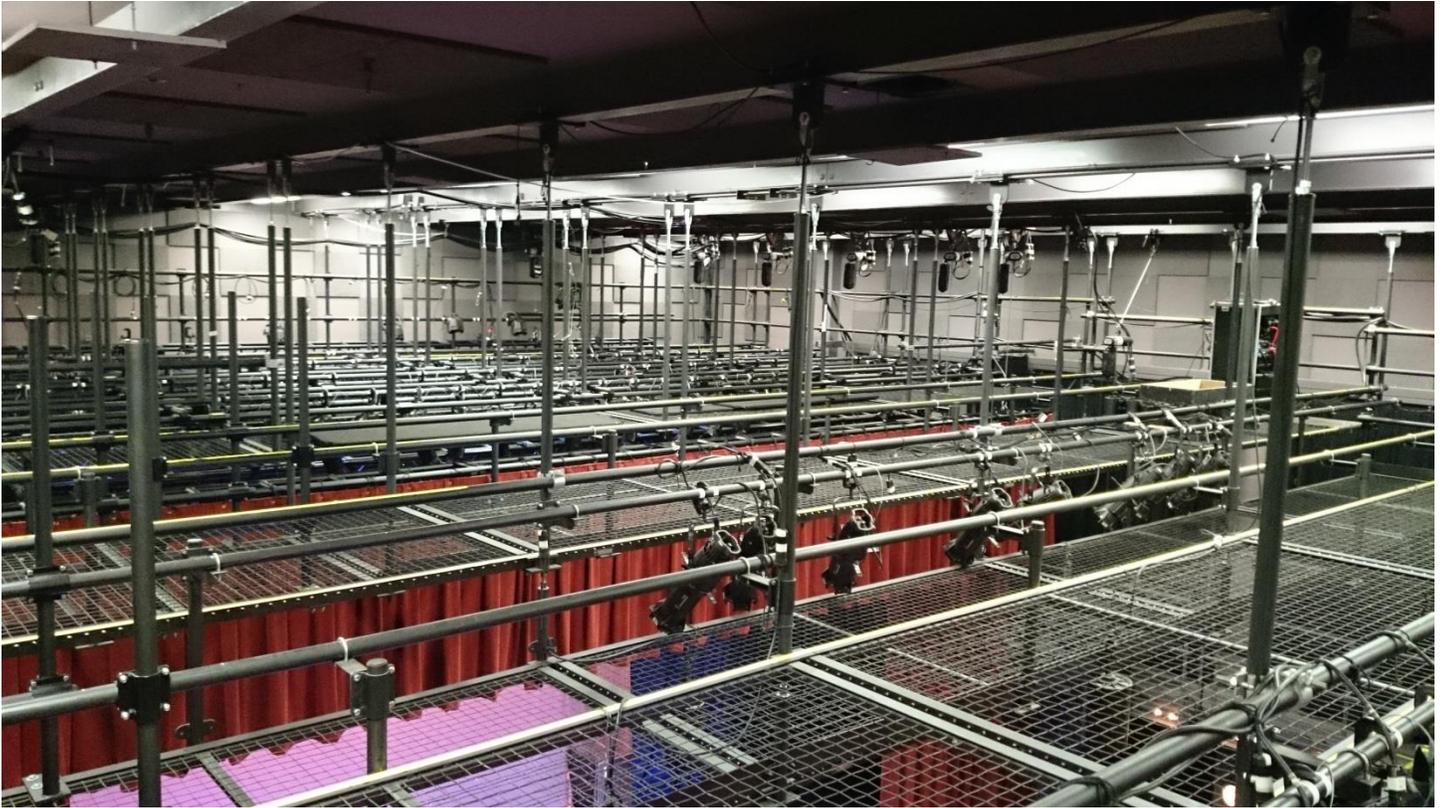


View from -A- looking USL.

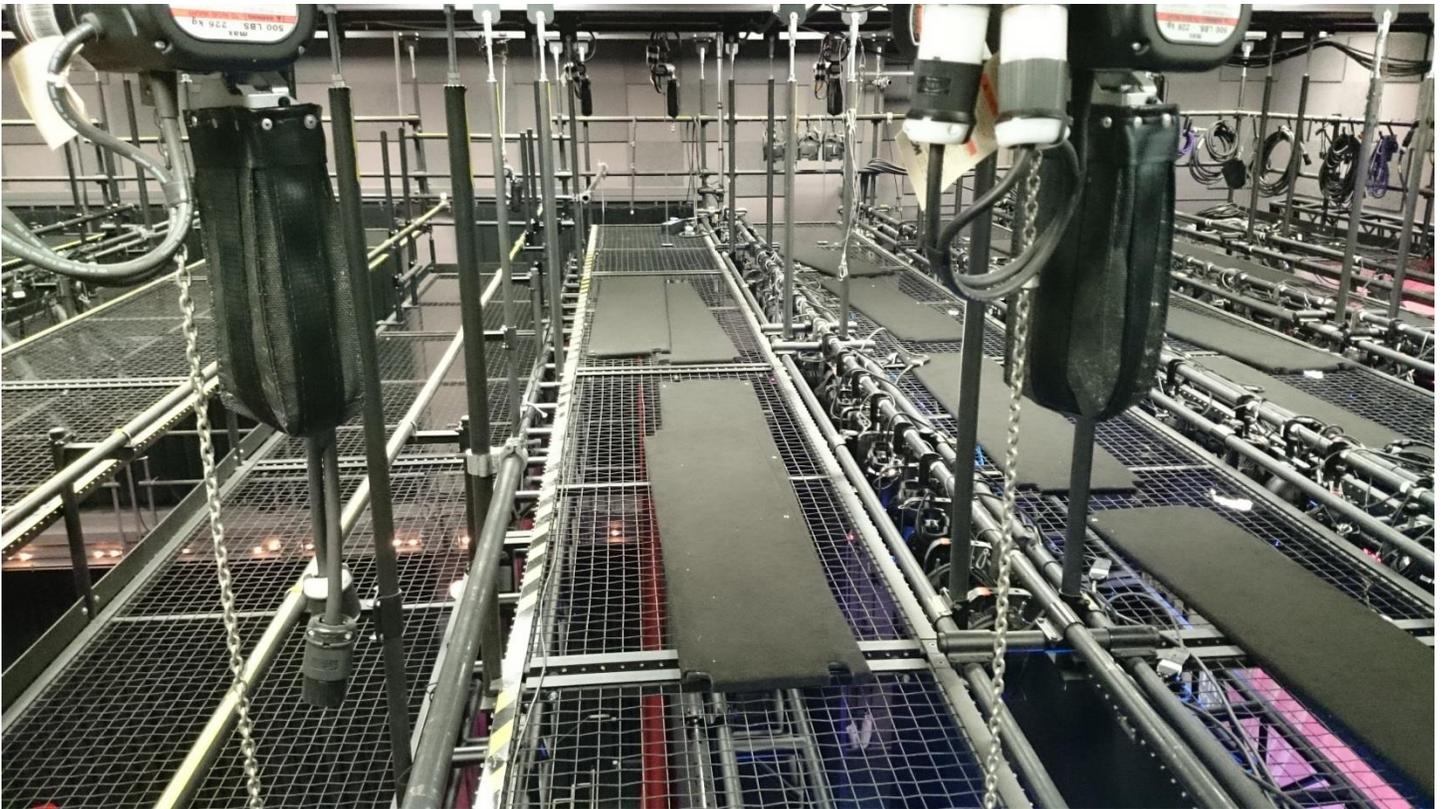


View from -B- looking SR.




View from -C- looking DSR.

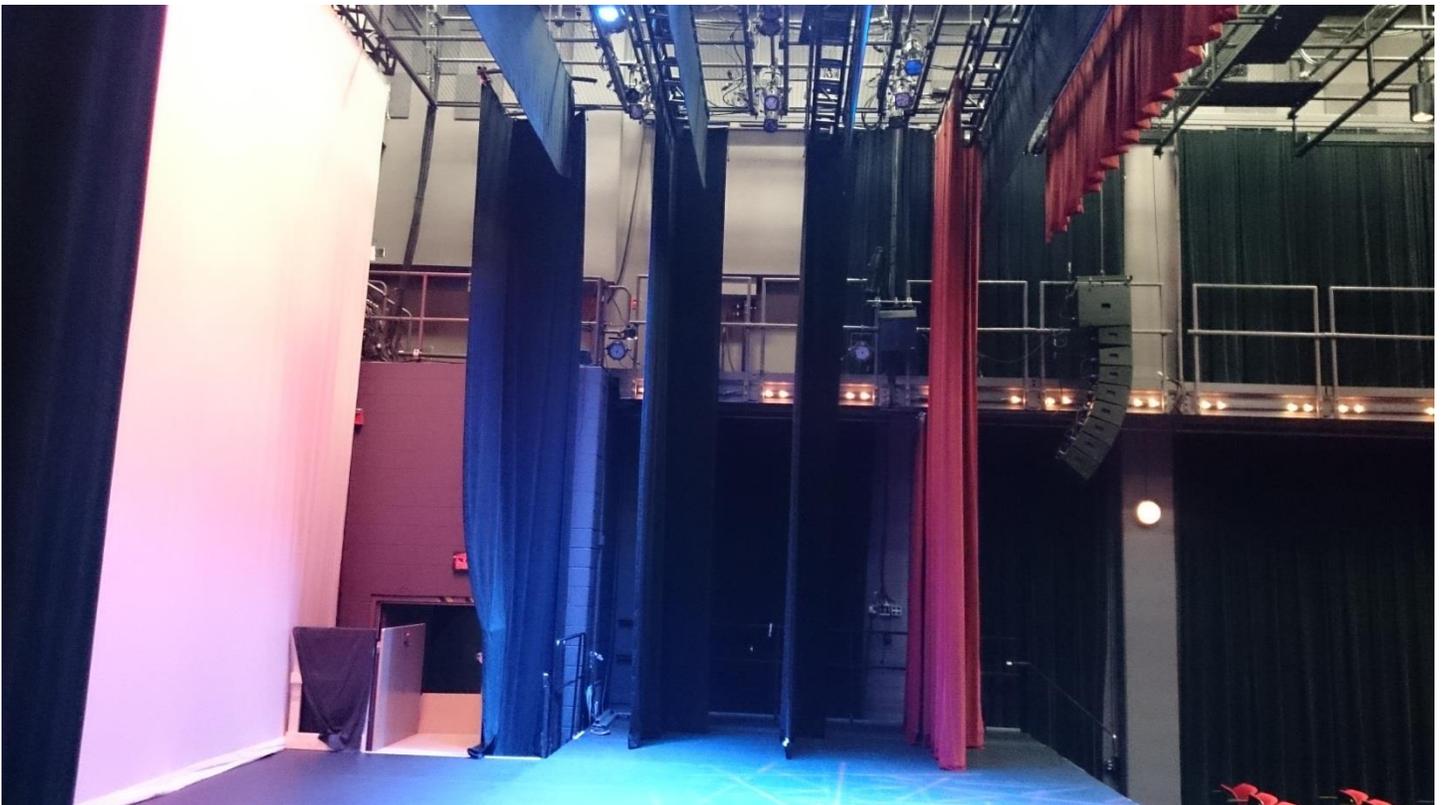

View from SR wing showing red legs in #2 position, creating a small apron.

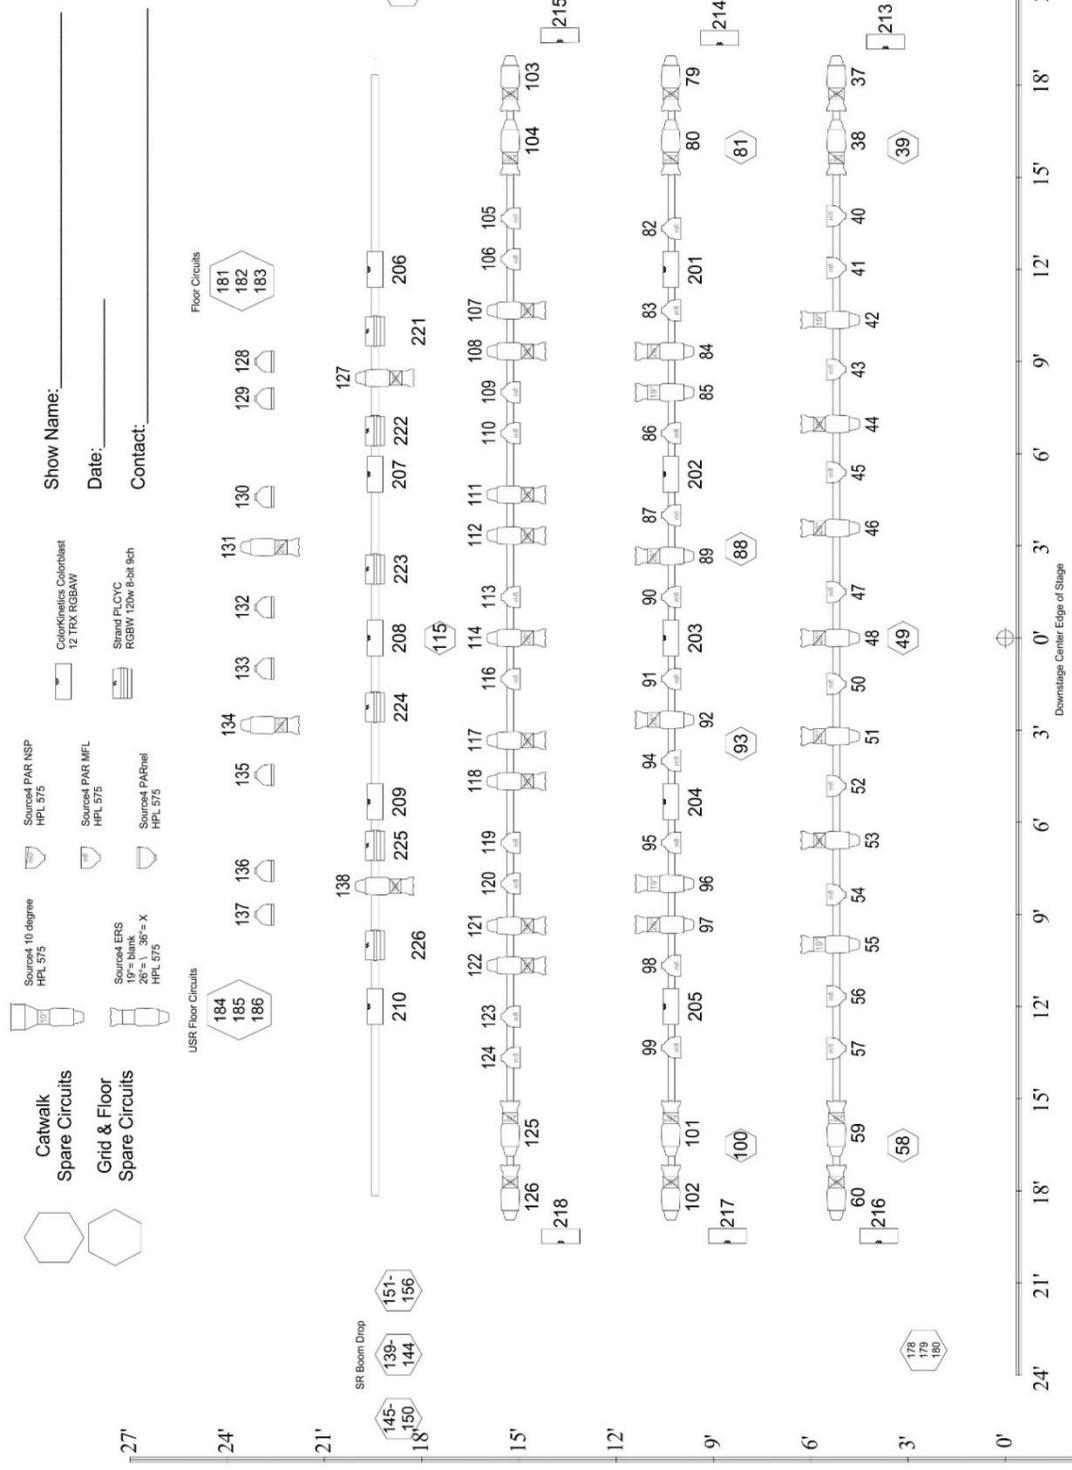

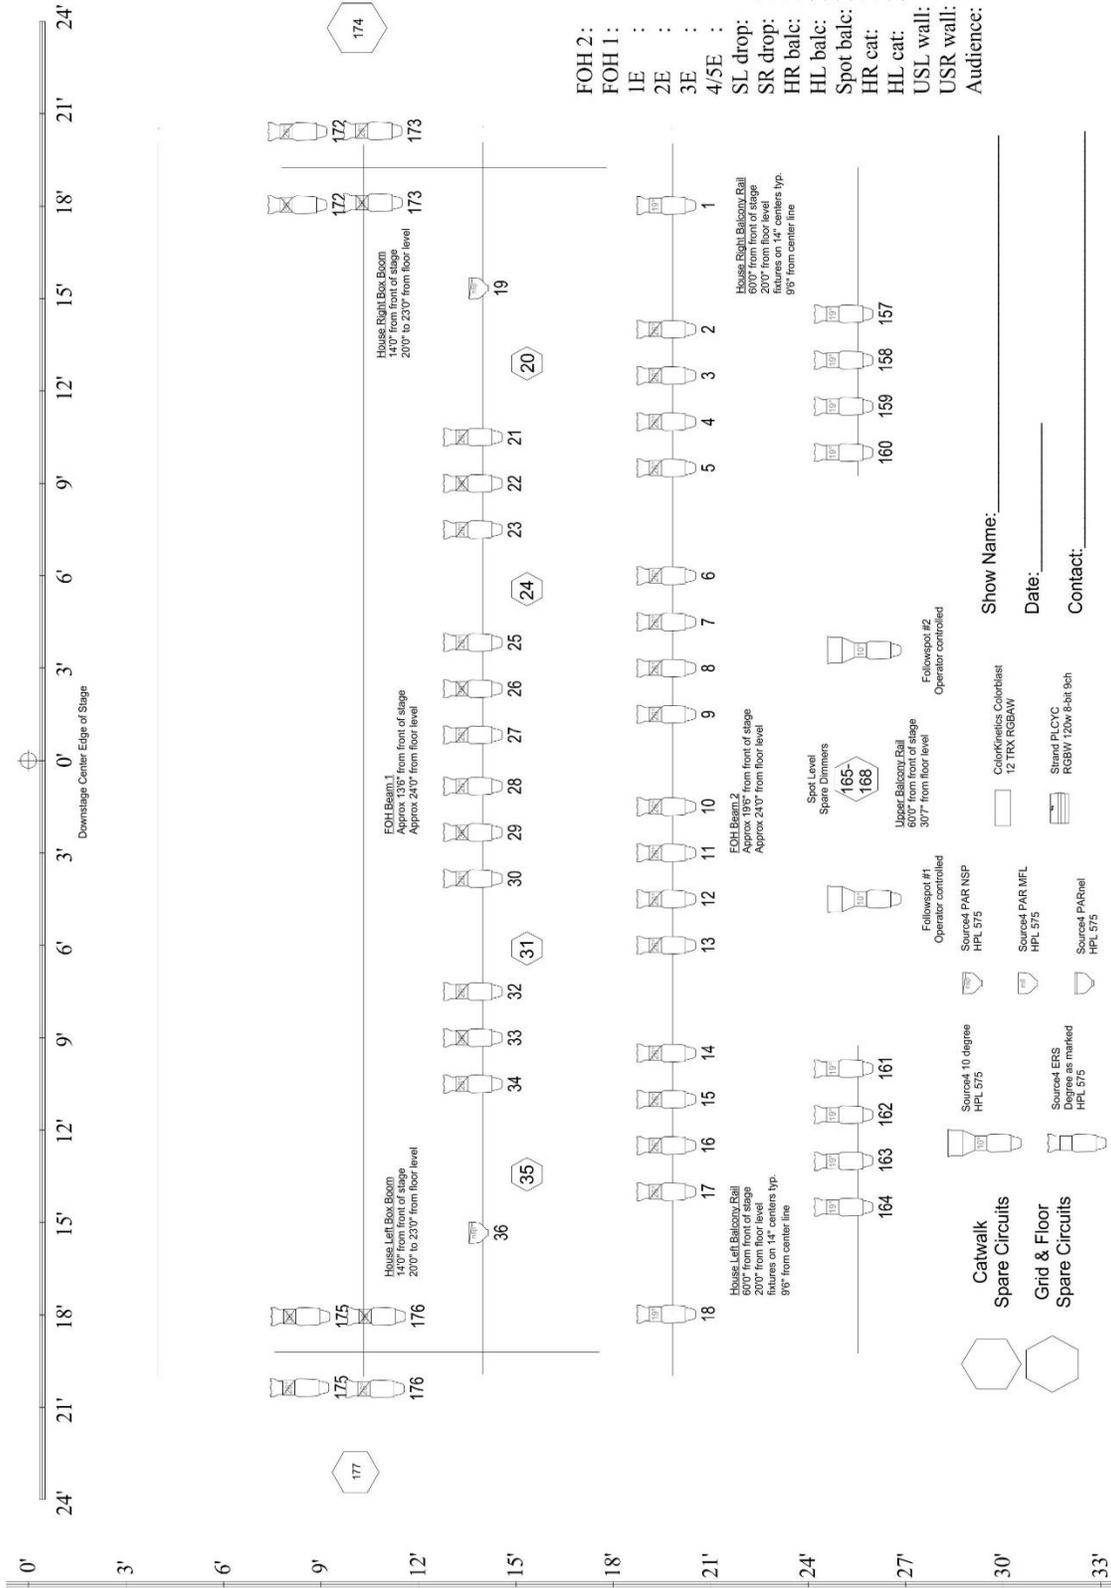

- FOH 2: 1-18
- FOH 1: 19-36
- 1E : 37-60
- 2E : 79-102
- 3E : 103-126
- 4/5E : 127-138
- SL drop: 61-78
- SR drop: 139-156
- HR balc: 157-160
- HL balc: 161-164
- Spot balc: 165-168
- HR cat: 169-174
- HL cat: 175-180
- USL wall: 181-183
- USR wall: 184-186
- Audience: 187-192

Show Name: _____
 Date: _____
 Contact: _____

- Followspot #1
Operator controlled
- Followspot #2
Operator controlled
- Spot Level
Spare Dimmers
- Upper Balcony Rail
800' from front of stage
200' from floor level
307' from floor level
- Lower Balcony Rail
800' from front of stage
200' from floor level
96' from center line
- House Left Box Boom
140' from front of stage
200' to 230' from floor level
- House Right Box Boom
140' from front of stage
200' to 230' from floor level
- FOH Beam 1
Approx 195' from front of stage
Approx 240' from floor level
- FOH Beam 2
Approx 195' from front of stage
Approx 240' from floor level
- ColorKinetics Colorblast
12 TRX RGBAW
- Standard P/CYC
RGBW 120x 6-til 9ch
- Sourc4 PAR NSP
HPL 575
- Sourc4 PAR MFL
HPL 575
- Sourc4 PAR (Reel)
HPL 575
- Sourc4 10 degree
HPL 575
- Sourc4 ERS
HPL 575

SOUND & COMMUNICATIONS SPECIFICATIONS

The Playhouse is equipped with a permanently installed sound system. The console is set up to be controlled from the catwalk outside the control booth on the house right side. The entire system is powered with Powersoft amplifiers, with crossovers and EQ Installed on internal DSP.



View from FOH mixing position.

CONSOLE Avid Venue PROFILE 48x16

- 1 Avid PROFILE Console
- 48 Channels to Stage/ 16 Channels local for Playback
- 8 Groups
- 16 Mix Buses
- 8 Matrix Buses
- 4 Multi effect
- 8 Graphic EQs
- 48 Compressors / 48 Gates

SPEAKERS

- 16 Aclon RS6 flown in L/R line array / 8 cabinets per side
- 4 EAW SB25OR Subs on floor under stage DSL/R

MONITORS

- 8 EAW SM-200 Monitors
- 4 Mixes with EQ available from FOH console,
- 2 Flown Side-Fills on Downstage S/L and S/R [1 Mono Mix]

Available Option : May incur additional Charges for Equipment and Monitor Technician Independent Monitor Console

1 Avid Venue PROFILE 48

To control up to 7 Monitor wedge mixes plus an Engineer mix for larger quantities of Mixes such as needed for In ear systems mixed with live wedges

STAGE SNAKE FROM STAGE TO BOOTH

- 40 Input channels & 16 sends

PLAYBACK AND RECORD SOURCE GEAR

- 1 Tascam DN300R SD/USB Player/ Recorder
- 1 Mac book Pro with Q-Lab Version 5

WIRELESS MICROPHONE SYSTEMS

- 8 Shure ULX-D series wireless: 8/ SM58 handheld , 8/ body packs
- 8 Pointe Source Over Ear Mics and Assorted Countryman Lavalier
- 8 Elite Core HS-10 Over Ear sets [Variable Youth and Adult Sizing]

Each wireless handheld has a corresponding wireless body pack which shares a frequency and cannot be used at the same time

WIRED MICROPHONES & DIRECT BOXES

- 6 Shure SM58,
- 3 Shure SM81,
- 1 AKG C-391B,
- 5 Shure SM98,
- 1 Radial Pro AV,
- 1 Radial J48 ,
- 2 Countryman Type
- 4 Shure SM57,
- 1 Sennheiser e906,
- 1 Shure Beta 52A,
- 1 Shure SM91A,
- 1 Radial USB Pro,
- 2 Radial Pro D2 (passive/Stereo),
- 8 Audio Technica Choir Mics (in Grid)

PLEASE NOTE:

All inventory is subject to availability. Contact Kravis Technical Department for information

STAGE MANAGER'S DESK

Located upstage Left in sound and light lock. It includes a Front of House video monitor, a Q-Lab reference Monitor, A four channel Green-Go intercom desk and a small worktable, with program audio monitor.




COMMUNICATIONS

- 1 GreenGo Intercom System
- 2 Desks
- 5 Wired four channel belt packs
- 4 Wireless Belt Packs
- 9 Head Sets

Merchandise tables can be set in the lobby. Contact KCPA Front of House for Merchandise information.

DRESSING ROOMS

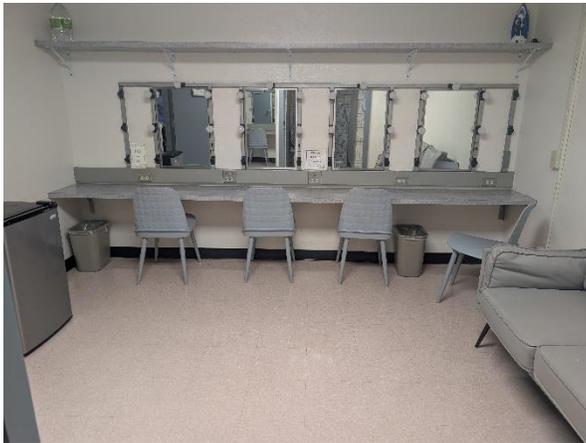

There are 2 Dressing rooms that can accommodate 5 people each. Each dressing room is equipped with hot and cold water, a shower, sink, toilet, lighted mirrors, and audio program monitors.



We have recently added an additional room downstairs for the use of Rinker Hall guests, It can be used as a Changing Room , Green Room or Production office and is large enough for up to 20 people. Ideal for Larger dance troupes and outfitted with dressing tables with mirrors, a refrigerator and Program /Page monitoring of the Rinker Hall.

WARDROBE

The wardrobe room is located on the basement level. There are (3) 20 lb. capacity two-speed washing machines, and (3) 20 lb. capacity dryers, (1) double laundry sink, (2) ironing boards and irons, (1) Sears sewing machine, and (1) Jiffy Steamer. There is an elevator in the receiving area to access the basement. Rolling wardrobe racks are available.

The wardrobe room can be used based on availability with events on the Dreyfoos Stage.

HEARING ASSISTANCE SYSTEM

20 - Sennheiser RF units , audio sent direct from FOH console

TELEPHONES

Telephone lines are available in the dressing rooms with advance notice.

ORCHESTRA EQUIPMENT SPECIFICATIONS

The Playhouse is equipped with acoustic curtains surrounding the room that may be opened or closed depending on the acoustics you are trying to achieve. The room has a 50/50 coverage of acoustic panels attached to the ceiling and upper wall to help the natural acoustics.

CONCERT SHELL

7 - Wenger Wood Grain portable concert panels

ORCHESTRA EQUIPMENT (BASED ON AVAILABILITY)

- 100 - Orchestra Chairs
- 9 - Cello Chairs
- 110 - Music Stands
- 80 - Music Stand Lights
- 8 - Bar Stools
- 1 - Conductors Podium and Stand
- 9 - Choral Risers

PIANOS


- 2 - 9' Steinway Concert Grand Model D
- 1 - 6' Yamaha Concert Grand C3F
- 2 - Studio Yamaha upright pianos

Note: Pianos may be tuned by house piano tuner only.

VIDEO EQUIPMENT

- 1 - Roland Video Switcher Model V-80HD w/ Monitor
- 1 - Video Projector Pre hung in Room,
- 1 - Motorized Projection screen , Mid-Stage

Image size will cover Upstage White Cyc or various available sizes of Da-lite mobile framed projection screens as well as the in house motorized screen

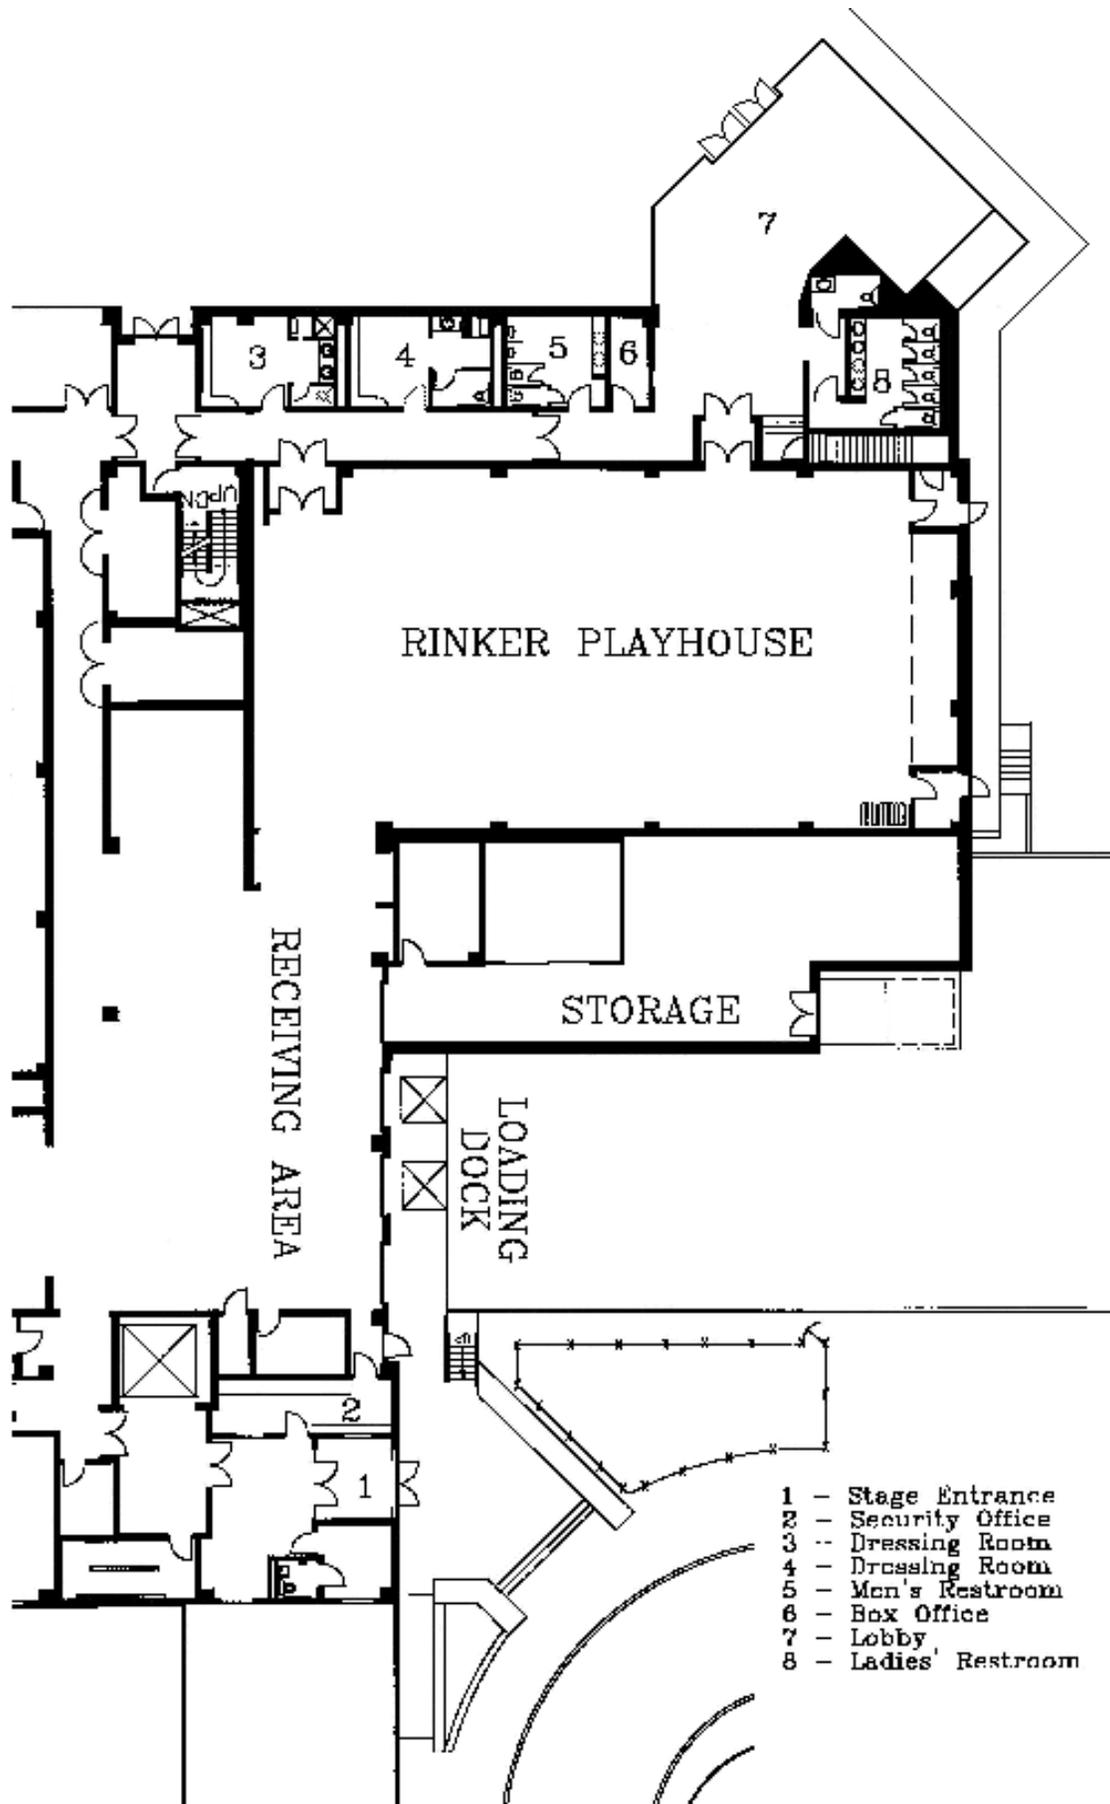



RINKER PLAYHOUSE

RECEIVING AREA

STORAGE

LOADING DOCK

- 1 - Stage Entrance
- 2 - Security Office
- 3 - Dressing Room
- 4 - Dressing Room
- 5 - Men's Restroom
- 6 - Box Office
- 7 - Lobby
- 8 - Ladies' Restroom

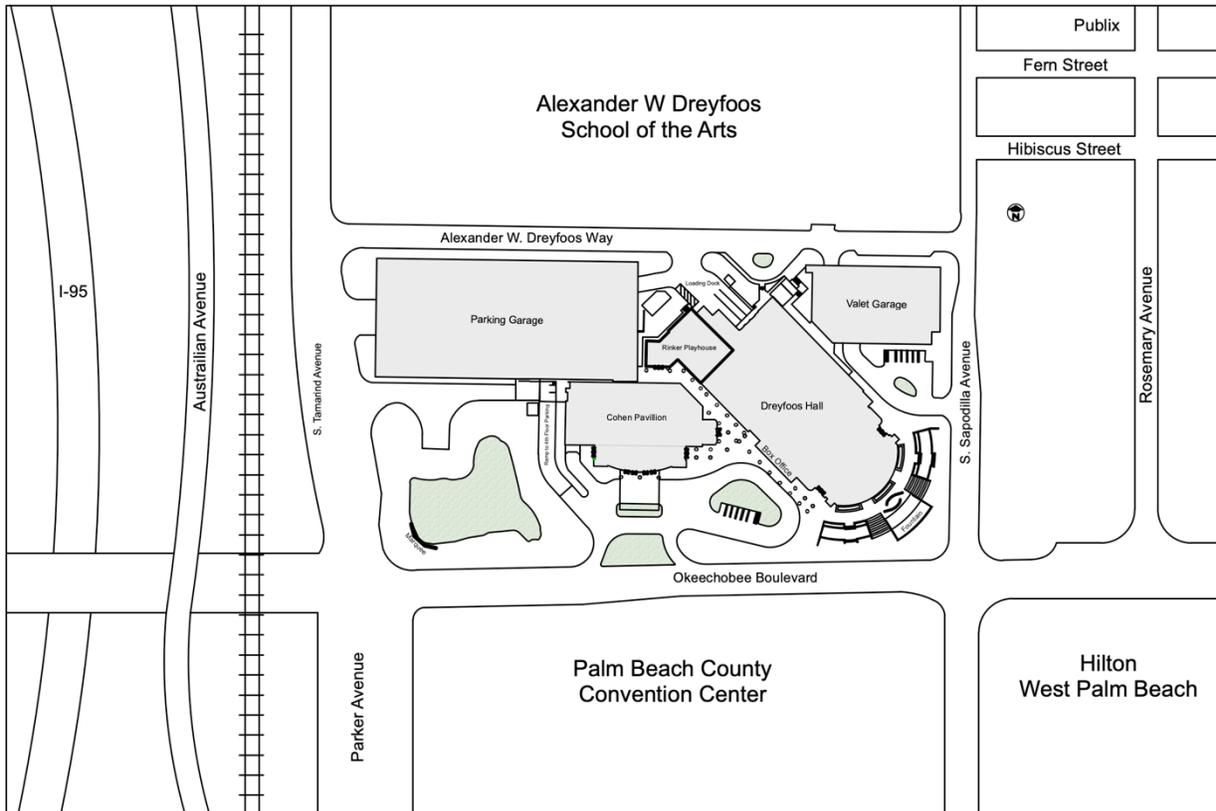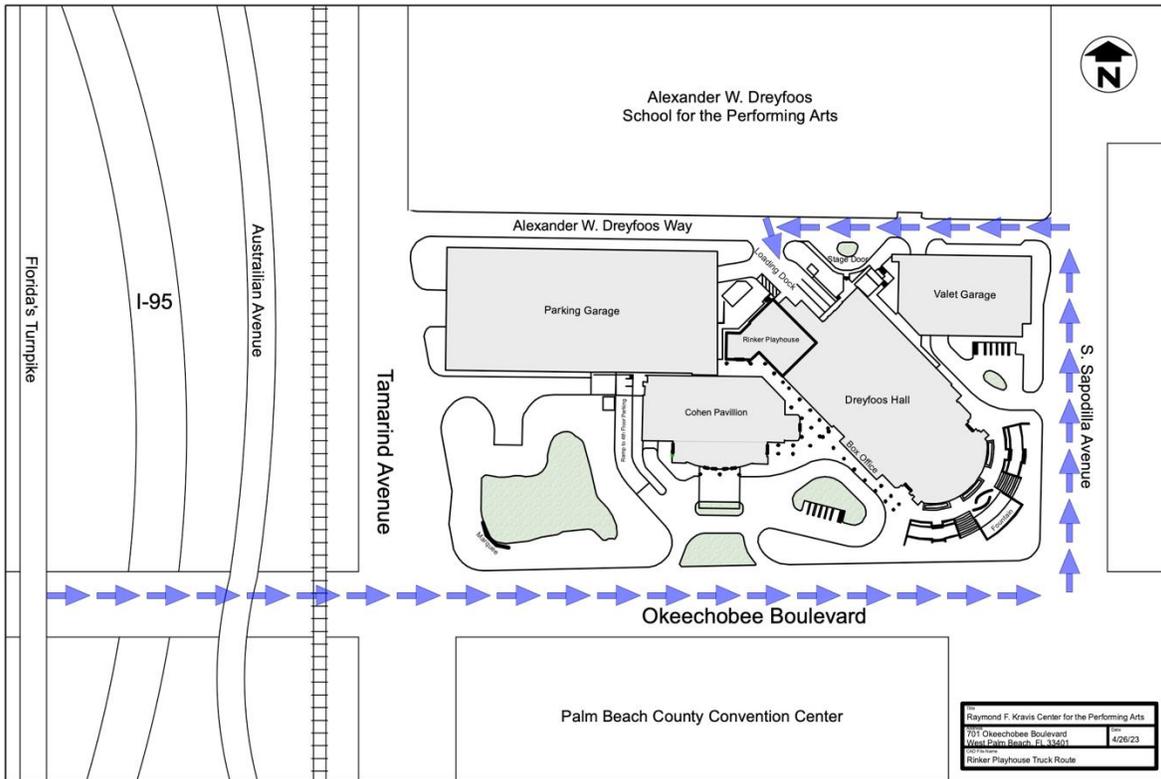

LOADING DOCK / Street View



LOADING DOCK / Dock and Ramps View



LOADING DOCK

The Loading Dock is located off Alexander Dreyfoos Way on the north side of the building. There are 3 bays, 2 with Serco mechanical Dock Levelers. Dock is 4' High with 2100 square feet of Receiving Room area. Loading doors are 8'W x 12'H.

RINKER PLAYHOUSE LOBBY AND BAR

